

Hyper Impact Wrench

SI-1490

SI-1490

SI-1490 SR




The max torque
850Nm

175mm length

Super light weight
composite body
Only 1.76kg

T valve trigger for easy speed control

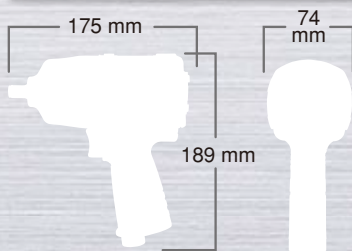

Soft touch grip
with twin molding

SI-1490

- Rubber grip absorbs the vibration remarkably well and also protects your hand from the cold.
- Light weight body design and easy to operate feather touch trigger.
- Handle grip exhaust directs air away from operator and workplace.
- 4 positions regulator dial for easy adjustment and it has an forward, reverse lever for easy adjustment.
- The regulator lever is yellow.

SI-1490 SR

- Full power in reverse help to unfasten bolts quickly for changing wheels.



Multifunction Lever
for easy operation

APPLICATIONS : This heavy duty 1/2" impact is designed for general automobile work and body shop

Specification : SI-1490 & SI-1490SR 1/2" IMPACT WRENCH

LENGTH	175mm	FREE SPEED(F)	8,000rpm	BOLT CAP	20mm/(3/4in.)
WIDTH	74mm	FREE SPEED(R)	8,500rpm	NOISE LEVEL	91dBA/(104power)
HEIGHT	189mm	MAXIMUM TORQUE	850Nm/(627ft-lb)	VIBRATION	4.8m/s ²
WEIGHT	1.76kg	WORKING TORQUE RANGE	620Nm/(457ft-lb)	AVG AIR CONSUMPTION	5.1CFM

※The maximum torque was measured under our established conditions. It may differ from the actual working torque.

※DESIGN PATENT PENDING



PNEUMATIC TOOLS
SHINANO INC.

<http://www.shinanoinc.com/>

Distributed by :